


TWS AUTOMATION

SR2600 SCREEN PRINTER

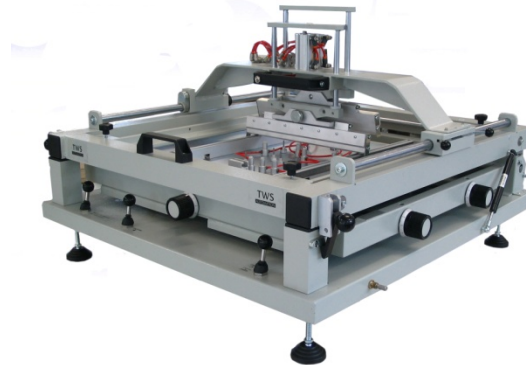

- ◆ The SR2600 is the next evolution of the best-selling SR2500 printer. It maintains the compact design of its' predecessor and improves the printing quality.
- ◆ Extremely easy to use.
- ◆ All the movements are air-assisted and can be adjusted according to the printing process.
- ◆ Vacuum System can also be held using the tooling pins provided.
- ◆ Adjustable snap-off speed which ensures smooth separation between the stencil and the board, thus improving the paste release from the stencil.
- ◆ The table vertical motion is pneumatically controlled by a front panel switch.
- ◆ Double-squeegee head with pneumatic print pressure regulation.
- ◆ Squeegee angle can be independently adjusted.
- ◆ 350mm metal blade squeegees.
- ◆ Universal tooling table with magnetic guides to accept any kind of board including double-sided.

Options

- ◆ 250mm adjustable metal blade (#US2500250R) or polyurethane squeegee (#US2500250P)
- ◆ 400mm adjustable metal blade (#US2500350R) or polyurethane squeegee (#US2500350P)
- ◆ Vacuum kit for blocking PCB (#UKITVACUM)

TECHNICAL DATA

Print area	422mm x 422mm
Maximum frame size	650mm x 545mm
Compressed air supply	4/6 bar
Maximum consumption	30 l/min
Dimensions	880mm x 900mm x 530mm
Net weight	80 Kg

